

**DEVELOP**

Dynamic balance

[www.develop.eu](http://www.develop.eu)



# ineo+ 3080/3070



- > Colour SRA3+ digital press
- > Up to 4,399 pages per hour

# Features that make all the difference!

To grow into digital with success means being able to fulfil certain standards, above all to guarantee absolute colour consistency and deliver a superb image quality. The products of the ineo+ 3080 series take these challenges in their stride. They provide the ultimate performance of up to 1,951 SRA3 pages per hour (ineo+ 3070), and up to 2,113 SRA3 pages per hour with the ineo+ 3080. Combining this with highest media flexibility and professional modular finishing, this is the perfect match for key operator environments.

## Durable performance

- > ineo+ 3080
  - > Up to 81 A4 pages per minute
  - > Up to 39 SRA3 pages per minute
  - > Up to 4,399 A4 pages per hour
  - > Up to 2,113 SRA3 pages per hour
- > ineo+ 3070
  - > Up to 71 A4 pages per minute
  - > Up to 36 SRA3 pages per minute
  - > Up to 3,823 A4 pages per hour
  - > Up to 1,951 SRA3 pages per hour

## Ready-made print products

- > 50-sheet booklet making with front trimming and 35-sheet booklets with optional creasing, slitting and spine corner forming
- > 102 sheets auto ring binding
- > Perfect binding for books of up to 30 mm
- > 100-sheet stapling with cutting mechanism
- > For highest automation and enormous productivity
- > For more profit in the print room




## Highest reliability

- > Long-life platform, long-lasting parts and consumables
- > Registration-swing mechanism for accurate duplex registration
- > Fusing-rolling mechanism
- > For prints with maximum efficiency
- > For lucrative short-run printing

## 3<sup>rd</sup> party finishing

- > Watkiss PowerSquare™ 224 for producing high quality SquareBack™ books
- > Plockmatic SD-500/SD-350 booklet maker with square fold
- > For higher flexibility
- > For more sophisticated print products

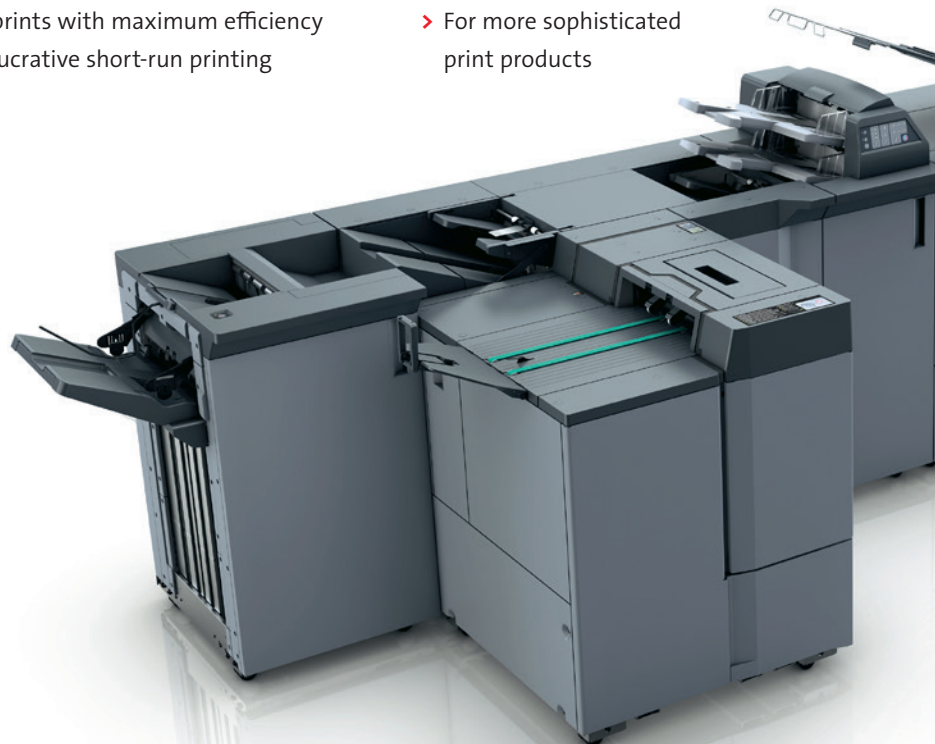

## Geared-up finishing

- > Multi (GBC) punching and 2- & 4-hole punching
- > 6 different types of folding
- > Large stacking
- > Minimised human interaction
- > For optimised budgets

## Environmental awareness

- > Robust and powerful despite the compact, lightweight body with fewer parts
- > Reduced power consumption with HD E toner
- > Industry-leading usage ratio of recycled PC and PET
- > For reduced environmental impact
- > Improved efficiency based on green values

### High-end print control

- > Flexible choice of controller technology: EFI®, CREO® or proprietary ineo controller
- > Integration into hybrid workflows
- > For intuitive operation
- > To save time and money



### Ease of use

- > Automated real-time engine calibration
- > Simple paper catalogue settings
- > Operator Replaceable Unit Management (ORUM)
- > For maximum ease of operation
- > Frees operators for more important jobs
- > Open API/IWS support

### Sophisticated media handling

- > Air-suction or air-assist feeding technology
- > Up to 15,390 sheets paper input capacity
- > Up to 11 paper input trays
- > For enhanced overall productivity
- > Banner size up to 1,300 x 330 mm
- > Envelope printing support
- > Banner duplex printing up to 762 x 330 mm

### Perfect image quality

- > 1,200 x 1,200 dpi x 8 bit resolution (equivalent to 1,200 x 3,600 dpi)
- > HD E toner technology
- > Image density control technology
- > For new print applications
- > For growing business

### Comprehensive media processing

- > Up to 350 gsm paper weight in simplex & duplex printing
- > Envelope printing support
- > Reliable thin paper feeding through air blow fusing separation
- > Mechanical decurling
- > Optional inter-cooler curl eliminator
- > For highly flexible print products
- > To stand out from the competition





## Technical specifications

### System specifications

<b>Resolution</b>	1,200 x 1,200 dpi x 8 bit; 1,200 x 3,600 dpi equivalent
<b>Paper weight</b>	62–350 gsm
<b>Duplex unit</b>	Non-stack type; 62–350 gsm
<b>Paper sizes</b>	330 x 487 mm; 330 x 1.300 mm (optional)
<b>Maximum image area</b>	323 x 480 mm; 323 x 1,295 mm (Banner)
<b>Paper input capacity</b>	Standard: 1,500 sheets Max.: 15,390 sheets
<b>Paper output capacity</b>	Max.: 13,600 sheets
<b>Main unit dimensions (W x D x H)</b>	800 x 903 x 1,076 mm; 800 x 903 x 1,041 mm (P-version)
<b>Main unit weight</b>	319 kg; 312 kg (AccurioPress C3080P)

### Productivity

<b>ineo+ 3080</b>	
<b>A4 - max. per minute</b>	81 ppm
<b>A3 - max. per minute</b>	45 ppm
<b>SRA3 - max. per minute</b>	39 ppm
<b>A4 - max. per hour</b>	4,399 pph
<b>A3 - max. per hour</b>	2,439 pph
<b>SRA3 - max. per hour</b>	2,059 pph

<b>ineo+ 3070</b>	
<b>A4 - max. per minute</b>	71 ppm
<b>A3 - max. per minute</b>	39 ppm
<b>SRA3 - max. per minute</b>	36 ppm
<b>A4 - max. per hour</b>	3,823 pph
<b>A3 - max. per hour</b>	2,113 pph
<b>SRA3 - max. per hour</b>	1,951pph

### Controller

<b>Internal ineo Controller</b>	IC-605
<b>Internal Fiery Controller</b>	IC-417
<b>External Fiery Controller</b>	IC-313
<b>External Creo Controller</b>	IC-314

### Scanner specifications\*

<b>Scan speed A4</b>	Up to 240 ipm
<b>Scan modes</b>	TWAIN scan; Scan-to-HDD; Scan-to-FTP; Scan-to-SMB; Scan-to-eMail
<b>Scan formats</b>	PDF, Secured PDF, Compact PDF, TIFF, JPEG, XPS, PDF/A-1a,1b
<b>Scan resolution</b>	600 x 600 dpi

### Copier specifications

<b>Gradations</b>	256 gradations
<b>FCOT</b>	Less than 8 sec. (colour A4)
<b>Magnification</b>	25–400%, in 0.1% steps
<b>Mutiple copies</b>	1–9,999

### Accessories

<b>Integrated color care unit</b>	IQ-501
<b>Original cover</b>	OC-511
<b>Automatic document feeder</b>	DF-706
<b>Working table</b>	WT-511
<b>Heating unit for main body trays</b>	HT-511
<b>Air assist paper feed unit</b>	PF-602m
<b>Heating unit for PF-602m</b>	HT-504
<b>Air suction paper feed unit</b>	PF-707m
<b>Heating unit for PF-707m</b>	HT-506
<b>Relay unit</b>	RU-518
<b>Humidification unit</b>	HM-103
<b>Multi (GBC) punching unit</b>	GP-501
<b>Relay unit</b>	RU-510
<b>Auto ring binding unit</b>	GP-502
<b>Folding and punching unit</b>	FD-503
<b>Stacking unit</b>	LS-506
<b>Booklet making unit</b>	SD-506
<b>Booklet making unit</b>	SD-513
<b>Booklet making unit</b>	Watkiss PowerSquare™ 224KR
<b>Booklet making unit</b>	Plockmatic SD-500/SD-350
<b>Creasing unit for SD-513</b>	CR-101
<b>Slitting unit for SD-513</b>	TU-504
<b>Square Folding unit for SD-513</b>	FD-504
<b>Perfect binding unit</b>	PB-503
<b>Stapling unit</b>	FS-532
<b>Saddle stitch kit for FS-532</b>	SD-510
<b>Punch kit for FS-532</b>	PK-522
<b>Post inserter for FS-532</b>	PI-502
<b>Envelope fuser</b>	EF-103
<b>Banner printing kit</b>	MK-740
<b>Banner printing kit for FS-532 or OT-510</b>	MK-740m
<b>Multiple bypass tray</b>	MB-506
<b>Multiple bypass tray for PF-707m</b>	MB-508
<b>Large capacity feeder</b>	LU-202m
<b>Large capacity feeder</b>	LU-202XLm (Banner)
<b>Large capacity output tray</b>	OT-511
<b>Open stacker</b>	OT-510
<b>Dehumidifying heater for 202m/XLm</b>	HT-503
<b>Envelope feeding kit</b>	MK-746
<b>Integrated Colour Care Unit</b>	IQ-501

## DEVELOP

Konica Minolta Business Solutions Europe GmbH  
Europaallee 17 30855 Langenhagen Germany Phone +49 511 7404-0 www.develop.eu

- All specifications refer to A4-size paper of 80 g/m<sup>2</sup> quality.
- The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.
- The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (5% coverage of A4). The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.
- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- DEVELOP and ineo are registered trademarks/product titles owned by Konica Minolta Business Solutions Europe GmbH.
- Konica Minolta does not warrant that any specifications mentioned will be error-free.
- All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.